


CEAM 370/2

Company	Customer	Date	2017-02-08
Contact	Contact	List price	Price on req.
Project	Phone number	Family code	
Project no.	Email	Item no.	107330100

Performance according to ISO 9906 - Annex A

Power datas referred to:

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

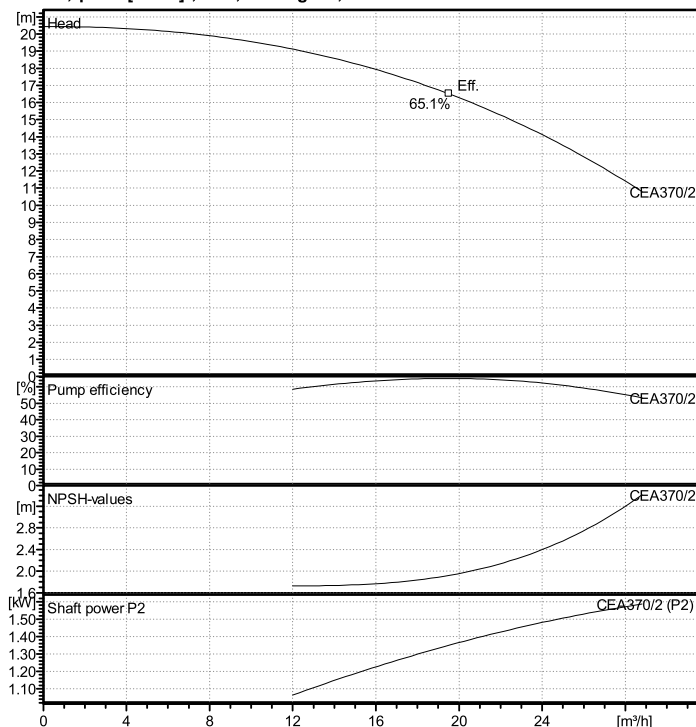

Operating Data Specification

Flow	0 m ³ /h
Head	0 m

Hydraulic data (duty point)

Flow
Head
Power input
MEI >= 0,4

Pump data

Make	Lowara
Type	CEAM 370/2
	Single-impeller centrifugal electric pump
Speed	2900
Head H(Q=0)	20.4 m
Suction side	
Discharge side	
Types of installation	Monobloc
Weight	16.1 kg

Materials / seals

Pump body	Stainless steel / AISI 304
impeller	Stainless steel / AISI 304
Diffuser	Stainless steel / AISI 304
Seal casing	Stainless steel / AISI 304

Shaft Seal

Rotating Assembly	V-Ceramic Alumina
Fixed Assembly	B-Carbon
Elastomers	P-NBR
Springs	G-AISI 316
Other Components	F-AISI 304

Motor data

Rated power P2	1.5 kW	Nom. Speed	2810 rpm
Frequency	50	Phase	1~
Rated voltage	230 V	Rated current	8.58 A
Protection class	IP 55	Insulation class	F
Permitted voltage tolerance +/- 10%			

Dimensions mm

A	54	H2	248
D	156	L	385
DNA	Rp2	L1	69
DNM	Rp 1 1/4		
H	224		
H1	113		

Note:

