


DIWA 15T

Company	Customer	Date	2017-02-08
Contact	Contact	List price	Price on req.
Project	Phone number	Family code	
Project no.	Email	Item no.	107680090

Performance according to ISO 9906 - Annex A

Power datas referred to:

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

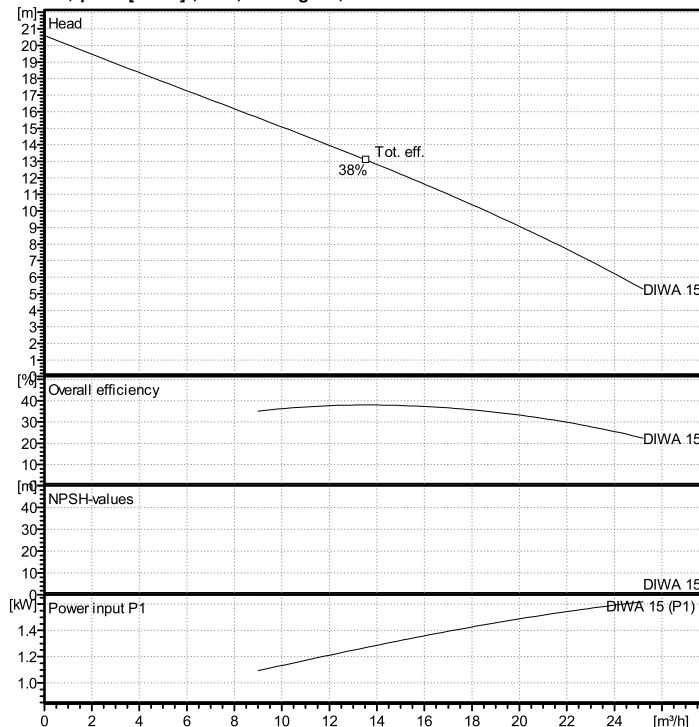

Operating Data Specification

Flow	0 m³/h
Head	0 m

Hydraulic data (duty point)

Flow
Head
Power input

Pump data

Make	Lowara
Type	DIWA 15T
	Submersible drainage pump
Speed	2900
Head H(Q=0)	20.6 m
Suction side	
Discharge side	
Types of installation	Submersible pump
Weight	16.5 kg

Materials / seals

Pump body	Stainless steel
Impeller	Stainless steel
SUCTION FLANGE	Stainless steel/Thermoplastic
Diffuser	PA 66 + 30 % GF

Shaft Seal

Rotating Assembly	Q1-Silicon carbide
Fixed Assembly	Q1-Silicon carbide
Elastomers	P-NBR
Springs	G-AISI 316
Other Components	G-AISI 316

Motor data

Rated power P2	1.5 kW	Nom. Speed	2820 rpm
Frequency	50	Phase	3~
Rated voltage	400 V	Rated current	3.89 A
Protection class	IP X8	Insulation class	F
Permitted voltage tolerance +/- 10%			

Dimensions mm

F	393		
H	375		

Note:

