

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

103002704

Model :

NOVA 200 M-NA SV

Pump data

Free passage : 5 mm
Pressure rating :
Min. fluid temperature : 0 °C
Max. fluid temperature : 35 °C
Max. Ambient temperature : 40 °C

Requested data



Flow : 0 m³/h
Head : 0 m
Fluid : Water, pure
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body Technopolymer
Impeller Technopolymer
OR ring NBR Rubber
Motor top body AISI 304 X5 Cr Ni 1810 UNI 6900/71
Rotor shaft AISI 431
Seeger ring 12E - UNI 7435 STAINLESS
Suction strainer Technopolymer

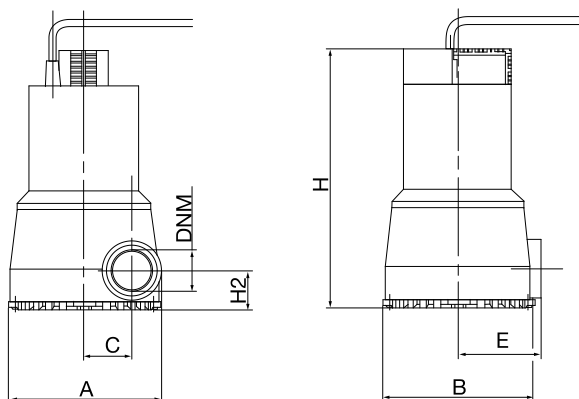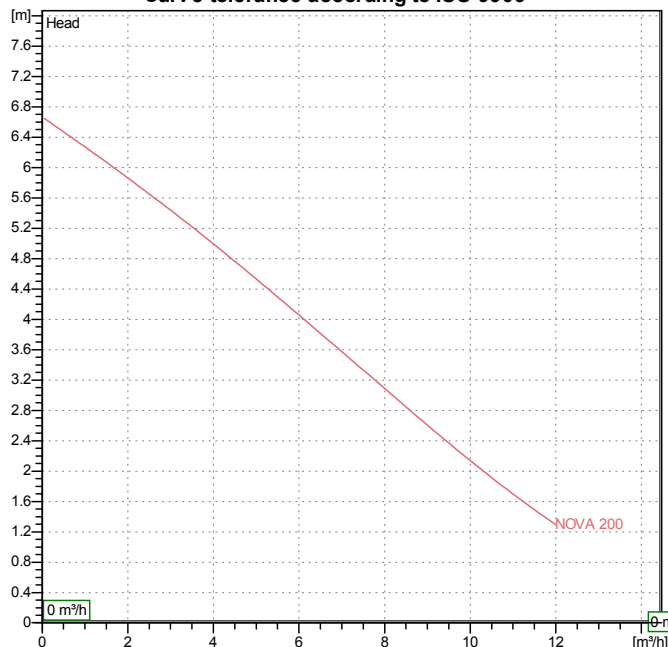Curve tolerance according to ISO 9906

Motor data
Weight : 4.5 kg

Motor brand : DAB
Nominal power P2 : 0.22 kW
Rated speed : 2850 rpm
Rated voltage : 1~ 220-240 V
Nominal current : 1.5 A
Degree of protection : IP 68

50 Hz

Dimensions in mm

A	148				
B	148				
C	46				
DNM	1" 1/4 G				
E	82				
H	253				
H2	38				


Pump connection

Suction side : /
Discharge side : 1" 1/4 G / --

Receiver	From
Society Reference Address Phone Fax E-mail	

NOVA 200 M-NA SV

Curve tolerance according to ISO 9906

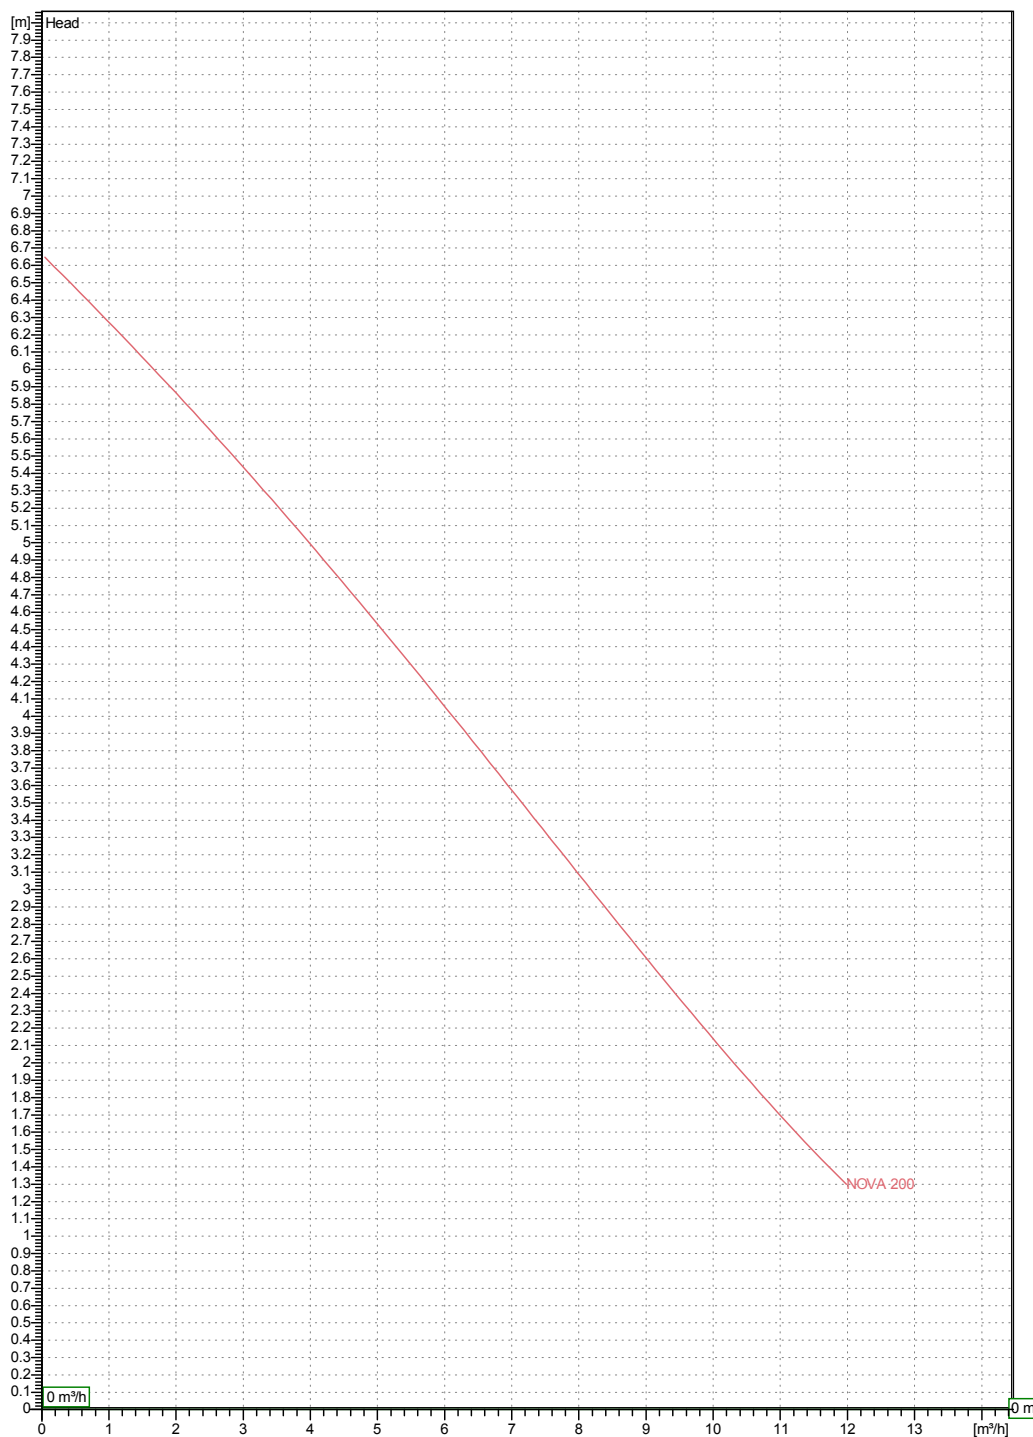

Hydraulic data (duty point)

Suction side :	Discharge side : 1 " 1/4 G	Flow : 0 m³/h	Head : 0 m	Rated speed : 2850 rpm
Project	Project ID	Created by	Created on	17/02/2017



WATER • TECHNOLOGY

DIMENSIONAL DRAWING

17/02/2017

Page 3 / 3



DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVA 200 M-NA SV

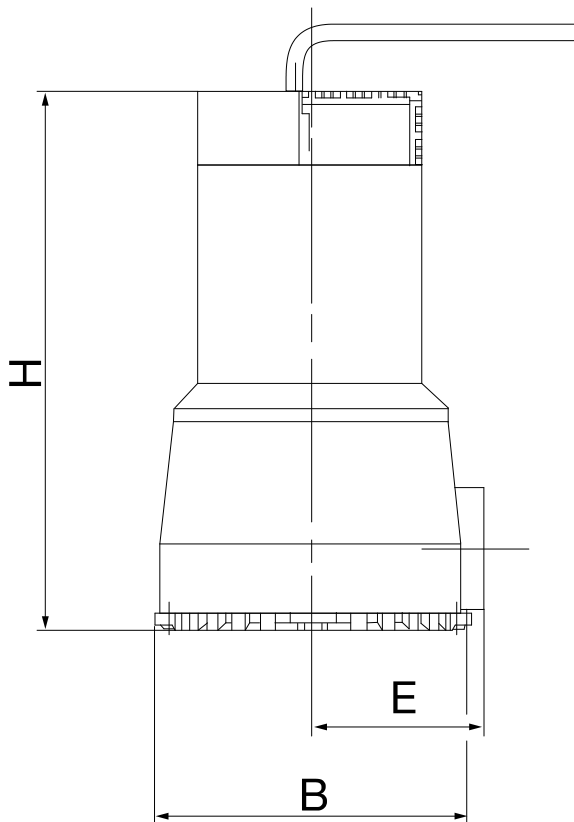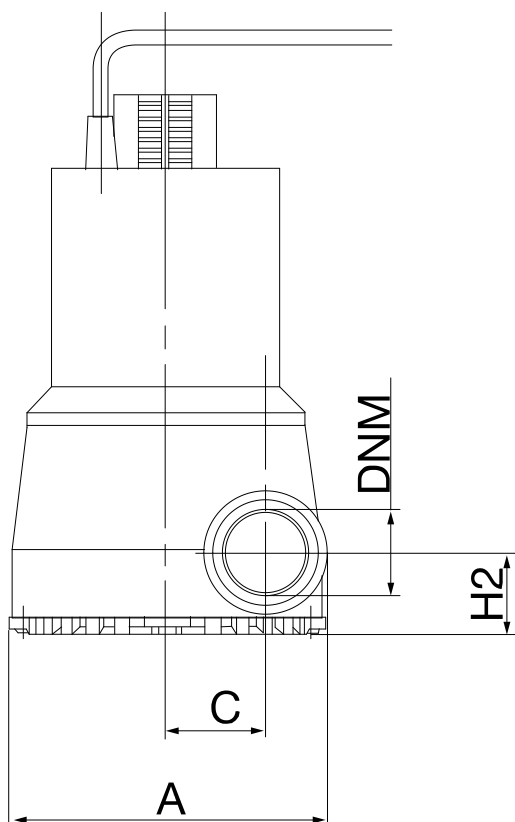

Dimensions in mm

1	A	148
2	B	148
3	C	46
4	DNM	1" 1/4 G
5	E	82
6	H	253
7	H2	38

Pump connection

Suction

Discharge
1" 1/4 G
-

Project

Project ID

Created by

Created on

17/02/2017