

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

103002744

Model :

NOVA 600 M-A SV

Pump data

Free passage : 10 mm

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature : 40 °C

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body Technopolymer

Impeller Technopolymer



OR ring NBR Rubber

Motor top body AISI 304 X5 Cr Ni 1810 UNI 6900/71

Rotor shaft AISI 431

Seeger ring 12E - UNI 7435 STAINLESS

Suction strainer Technopolymer

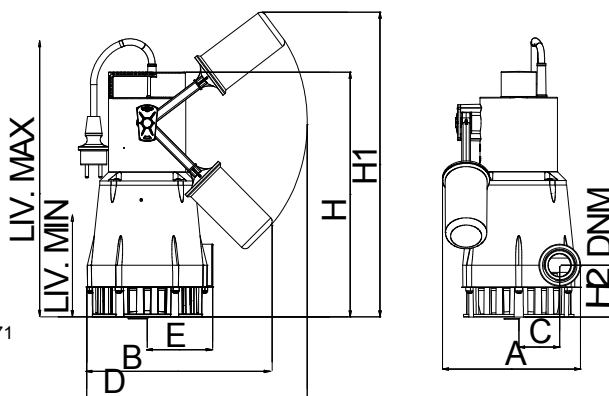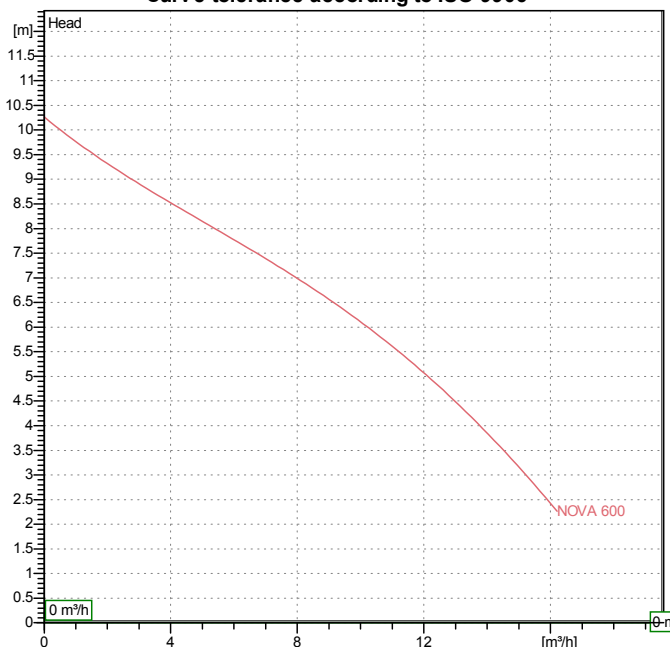Curve tolerance according to ISO 9906

Motor data

Weight : 7 kg

Motor brand : DAB

Nominal power P2 : 0.55 kW

Rated speed : 2850 rpm

Rated voltage : 1~ 220-240 V

Nominal current : 3.4 A

Degree of protection : IP 68

50 Hz

Dimensions in mm

A	189	H1	416		
B	253	H2	70.5		
C	56	LIV MAX	360		
D	303	LIV MIN	160		
DNM	1" 1/4 G				
E	90				
H	334				


Pump connection

Suction side : /
Discharge side : 1" 1/4 G / --

Receiver	From
Society Reference Address Phone Fax E-mail	

NOVA 600 M-A SV

Curve tolerance according to ISO 9906

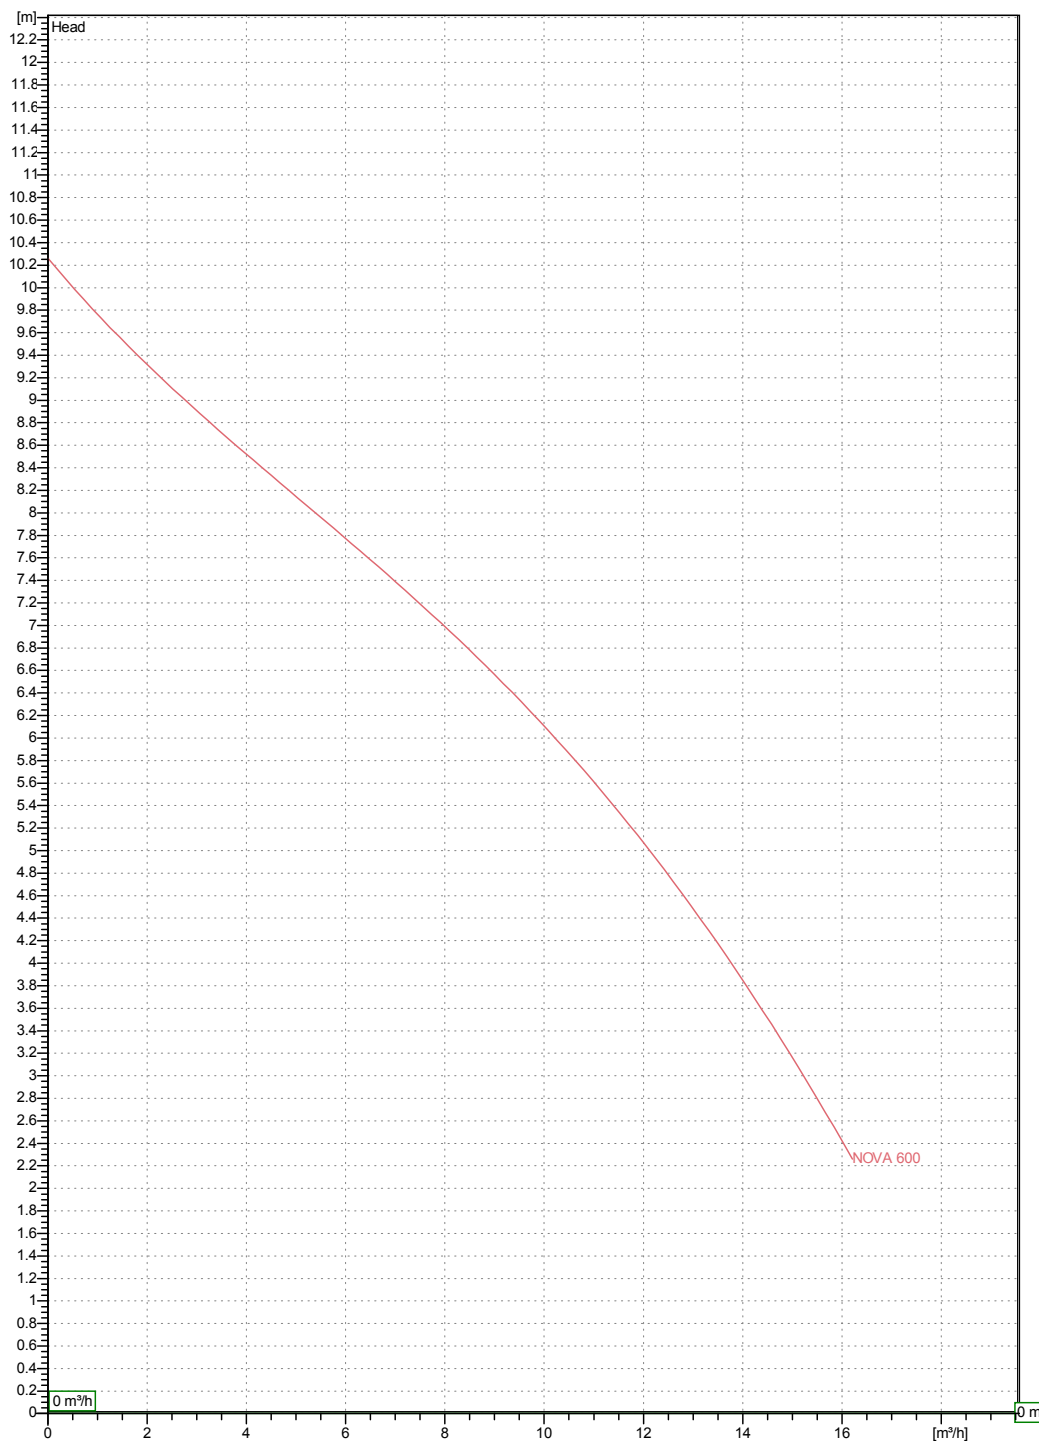

Hydraulic data (duty point)


Suction side :	Discharge side : 1 " 1/4 G	Flow : 0 m³/h	Head : 0 m	Rated speed : 2850 rpm
Project	Project ID	Created by	Created on 17/02/2017	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVA 600 M-A SV

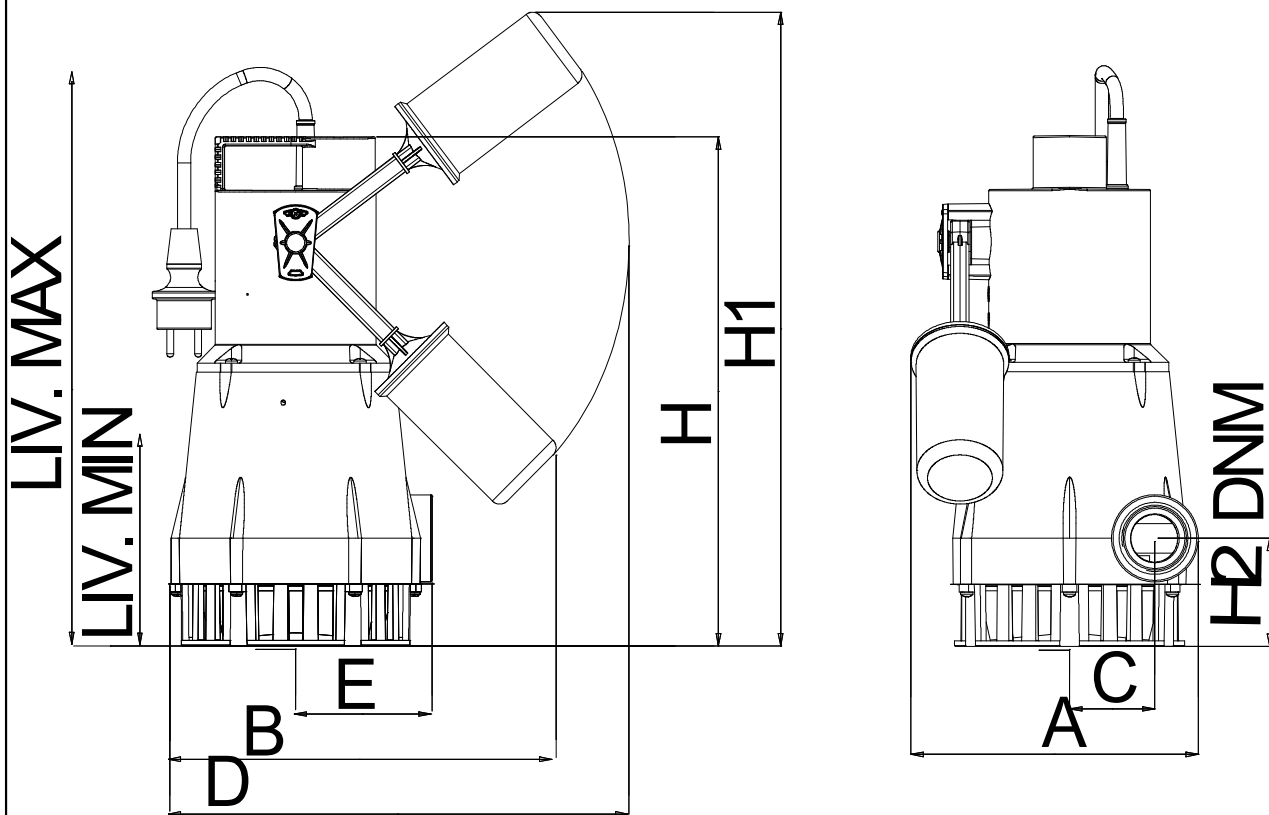

Dimensions in mm

1	A	189	LIV MIN	160		
2	B	253				
3	C	56				
4	D	303				
5	DNM	1" 1/4 G				
6	E	90				
7	H	334				
8	H1	416				
9	H2	70.5				
10	LIV MAX	360				

Pump connection

Suction

Discharge
1 " 1/4 G
-

Project

Project ID

Created by

Created on

17/02/2017