

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

103005814

Model :

NOVA 600 T-NA SV

Pump data

Free passage : 10 mm

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature : 40 °C

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa



Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body	Technopolymer
Impeller	Technopolymer
OR ring	NBR Rubber
Motor top body	AISI 304 X5 Cr Ni 1810 UNI 6900/71
Rotor shaft	AISI 431
Seeger ring	12E - UNI 7435 STAINLESS
Suction strainer	Technopolymer

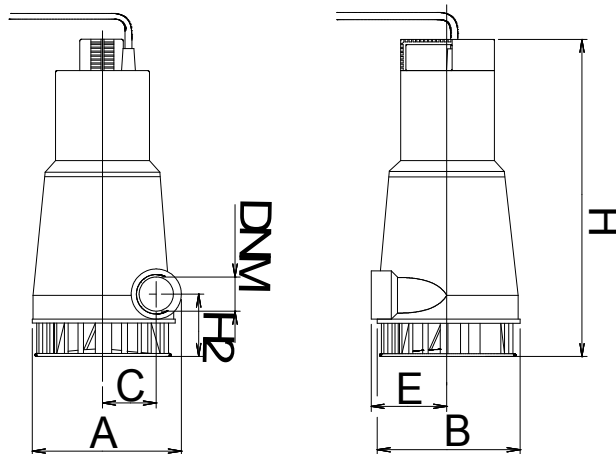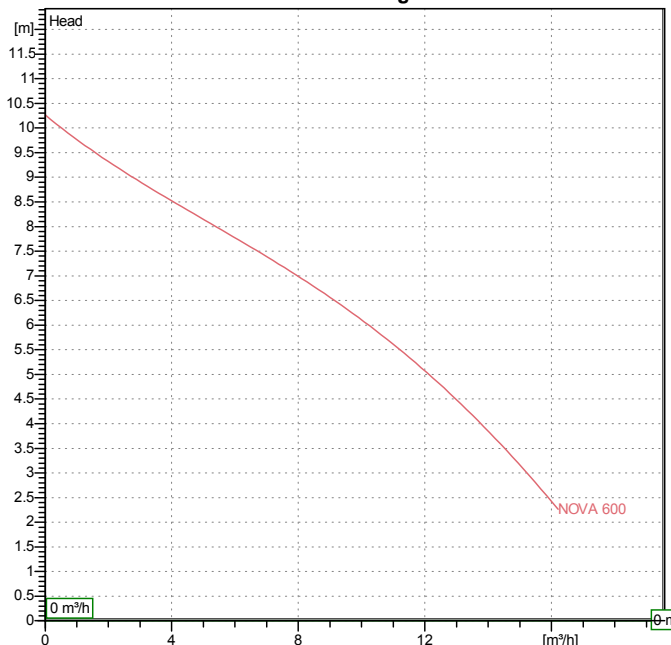Curve tolerance according to ISO 9906

Motor data
Weight : 6.7 kg

Motor brand : DAB

Nominal power P2 : 0.55 kW

Rated speed : 2850 rpm

Rated voltage : 3~ 400 V

Nominal current : 1.6 A

Degree of protection : IP 68

50 Hz

Dimensions in mm

A	162				
B	165				
C	56				
DNM	1" 1/4 G				
E	90				
H	334				
H2	70.5				


Pump connection

Suction side : /
Discharge side : 1" 1/4 G / --

	Receiver	From
Society Reference Address Phone Fax E-mail		

NOVA 600 T-NA SV

Curve tolerance according to ISO 9906

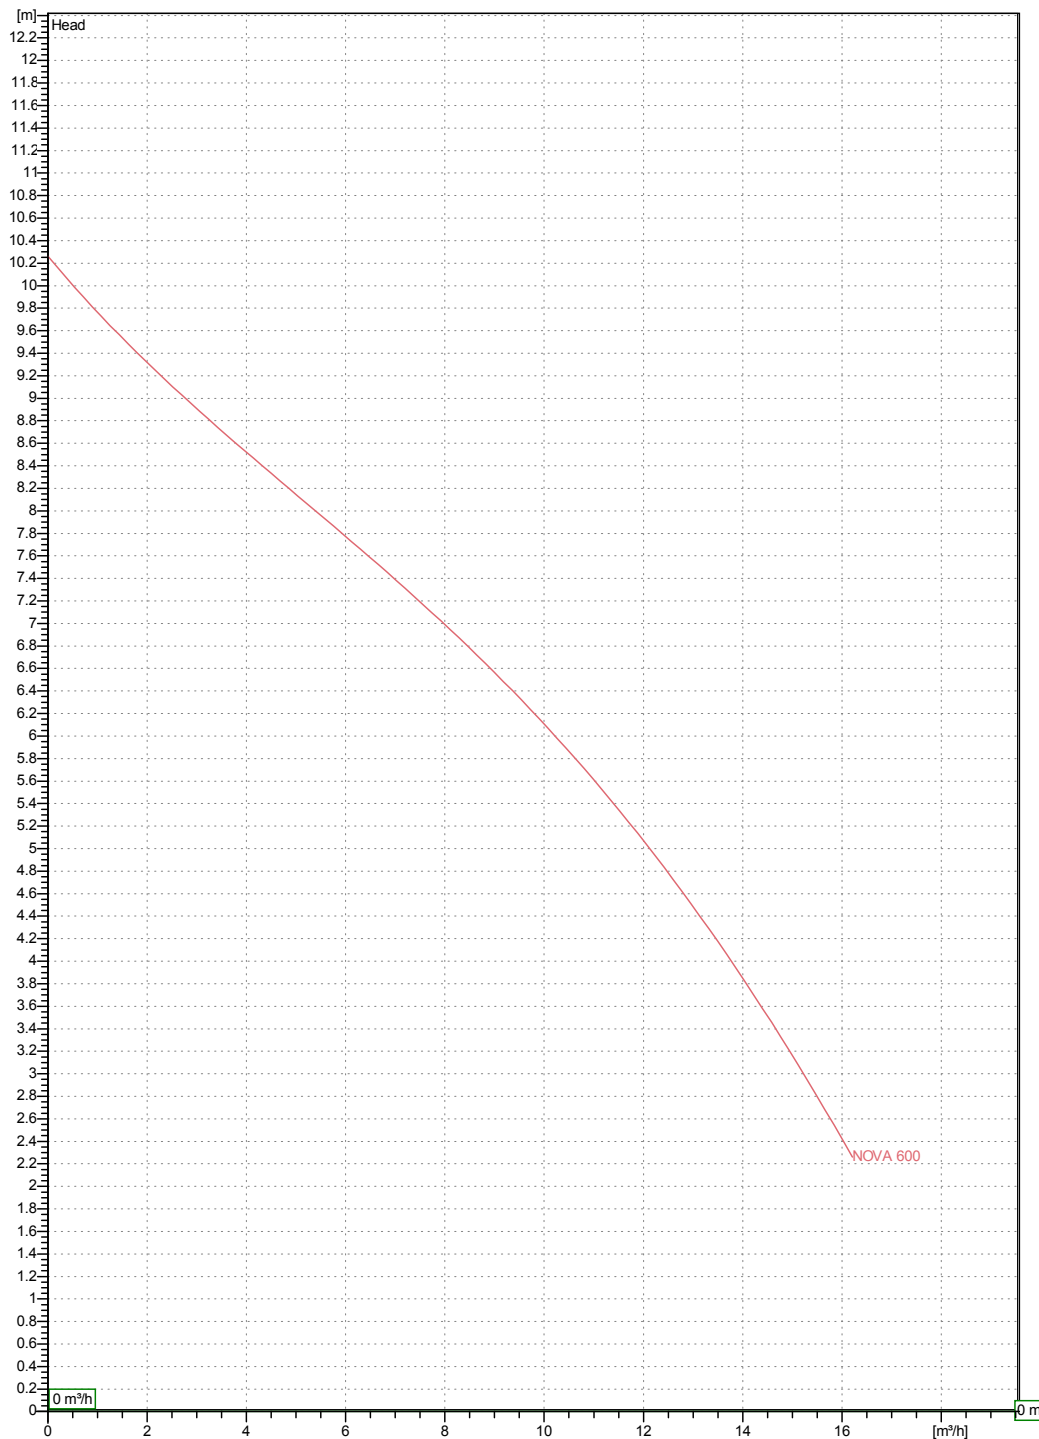

Hydraulic data (duty point)



Suction side :	Discharge side : 1 " 1/4 G --	Flow : 0 m³/h	Head : 0 m	Rated speed : 2850 rpm
Project	Project ID	Created by	Created on 17/02/2017	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVA 600 T-NA SV

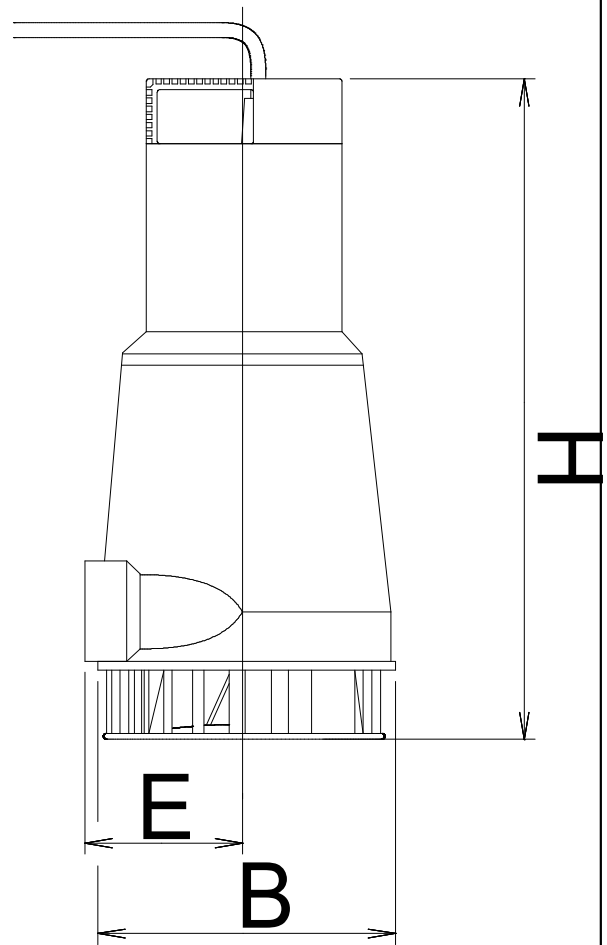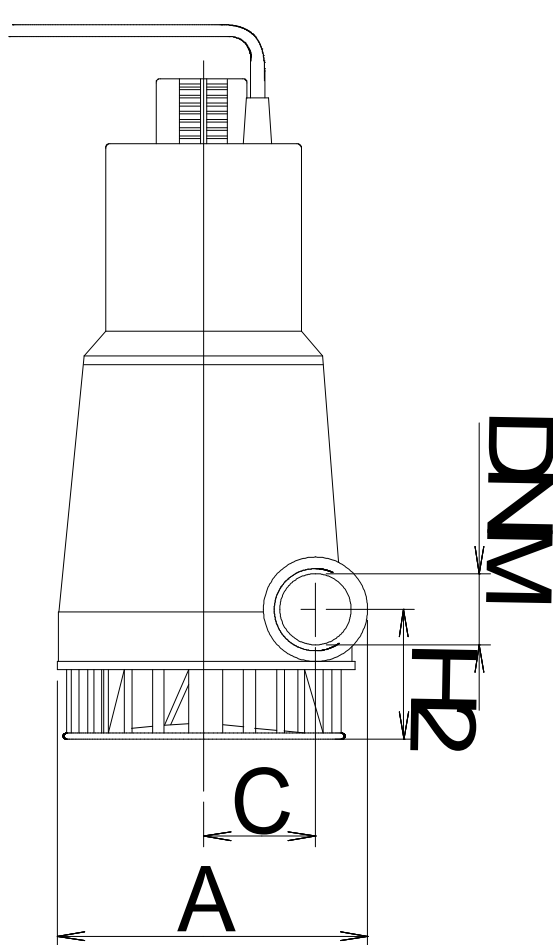

Dimensions in mm

							Pump connection
1	A	162					Suction
2	B	165					
3	C	56					
4	DNM	1" 1/4 G					Discharge 1" 1/4 G -
5	E	90					
6	H	334					
7	H2	70.5					

Project

Project ID

Created by

Created on

17/02/2017