


Data sheet: Stratos 25/1-6

Pump curves

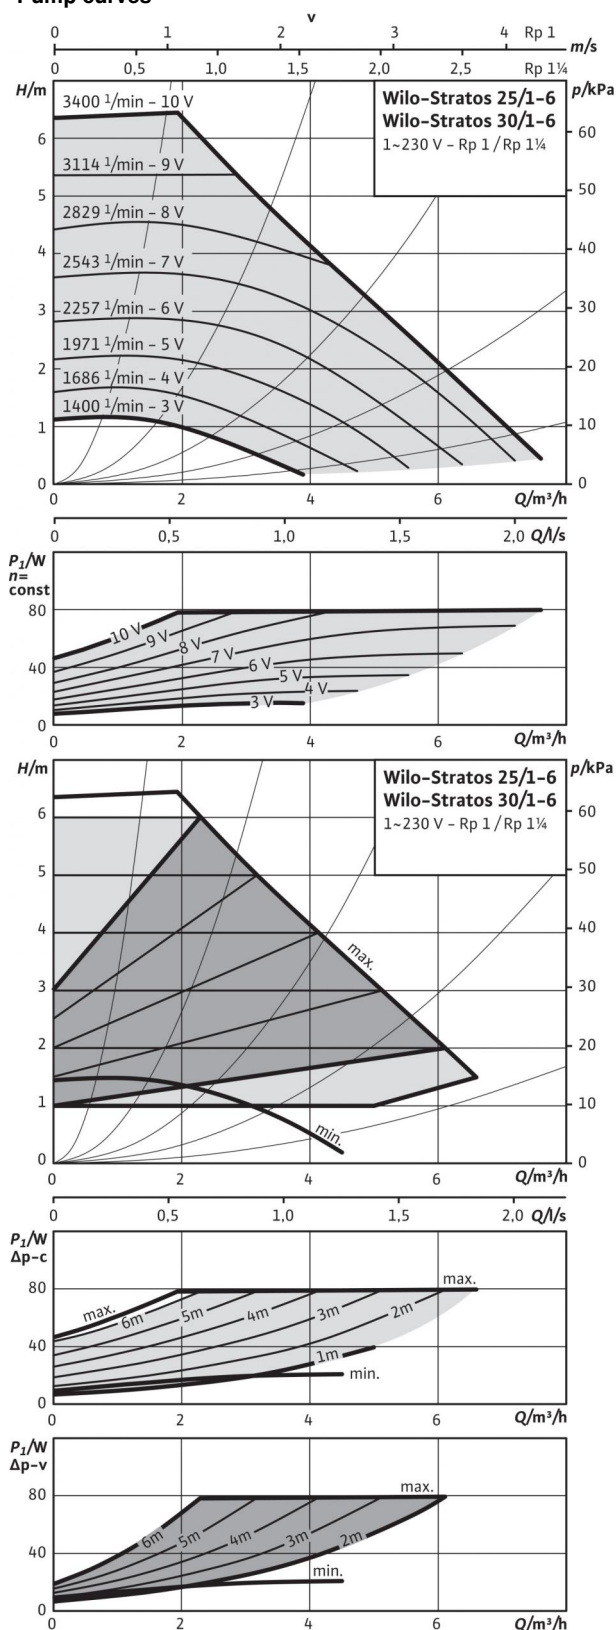

Approved fluids (other fluids on request)

Heating water (in accordance with VDI 2035)

Water-glycol mixtures (max. 1:1; above 20% admixture, the pumping data must be checked)

Permitted field of application

Temperature range at max. ambient temperature +40 °C

Maximum permissible operating pressure P_{max}

Pipe connections

Threaded pipe union

Thread

Overall length l_0

Motor/electronics

Energy efficiency index (EEI)

Emitted interference

Interference resistance

Speed control

Protection class

Insulation class

Mains connection

Rated power P_2

Speed n

Power consumption P_1

Current consumption I

Motor protection

Threaded cable connection PG

Materials

Pump housing

Impeller

Pump shaft

Bearing

Minimum suction head at suction port for avoiding cavitation at water pumping temperature

Minimum suction head at 50 / 95 / 110 °C

Information for order placements

Make

Type

Art no.

Weight approx. m

•

•

-10...+110 °C

10 bar

Rp 1

G 1 1/2

180 mm

≤ 0.20

EN 61800-3;2004+A1;2012 /residential area (C1)

EN 61800-3;2004+A1;2012 /industrial environment (C2)

Frequency converter

IP X4D

F

1~230 V, 50/60 Hz

65.00 W

1400 - 3400 rpm

9 - 80 W

0.13 - 0.70 A

integrated

1x7/1x9/1x13.5

Grey cast iron (EN-GJL-200)

Plastic (PPE - 30% GF)

Stainless steel (X39CrMo17-1)

Carbon, metal impregnated

3 / 10 / 16 m

Wilo


Stratos 25/1-6

2090447


4.1 kg

Data sheet: Stratos 25/1-6

Dimension drawing

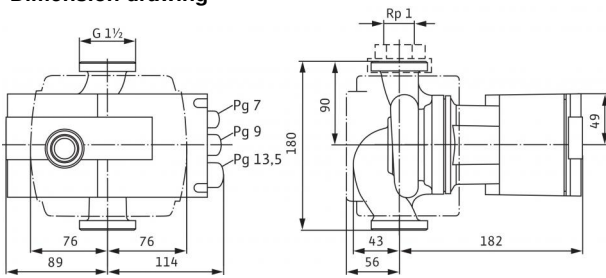

Terminal diagram




SSM:

Collective fault signal

(NC contact in accordance with VDI 3814, load capacity 1 A, 250 V ~)


Dimensions and dimensions drawings: Stratos 25/1-6

Dimension drawing

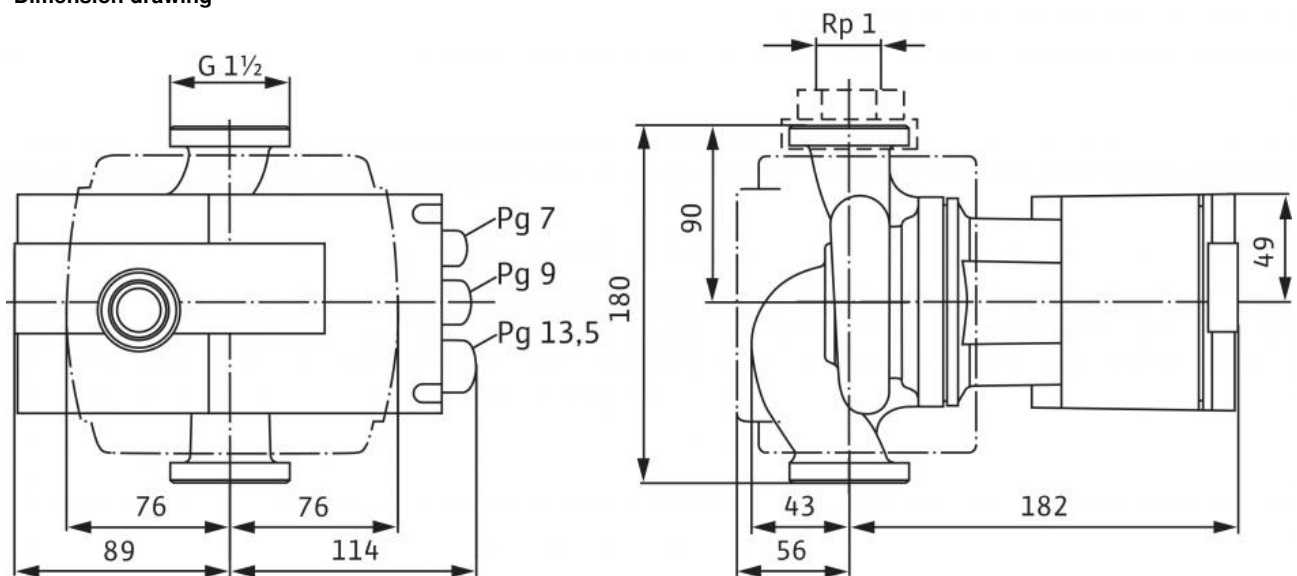

Installation positions: Stratos 25/1-6

Product information

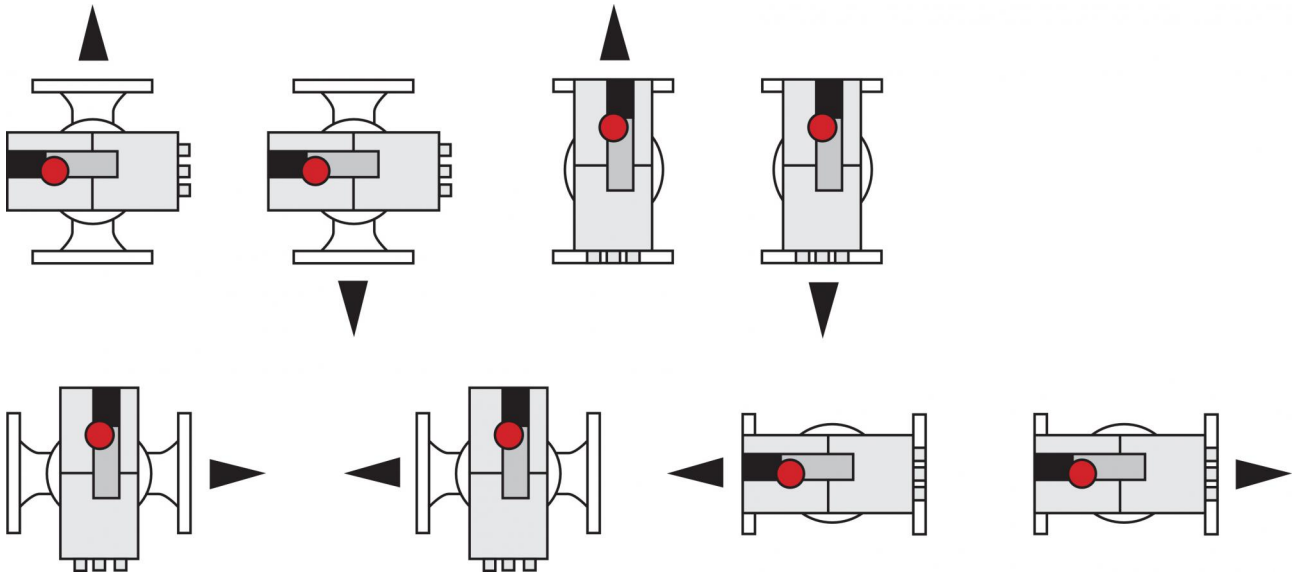

Pump curves: Stratos 25/1-6

Pump curves

