


## DOC 7VX GW

|             |              |             |               |
|-------------|--------------|-------------|---------------|
| Company     | Customer     | Date        | 3/5/2018      |
| Contact     | Contact      | List price  | Price on req. |
| Project     | Phone number | Family code |               |
| Project no. | Email        | Item no.    | 107540340     |

Performance according to ISO 9906:2012 – Grade 3B

### Power datas referred to:

Water, pure [100%] ; 4°C; 1000kg/m<sup>3</sup>; 1.57mm<sup>2</sup>/s

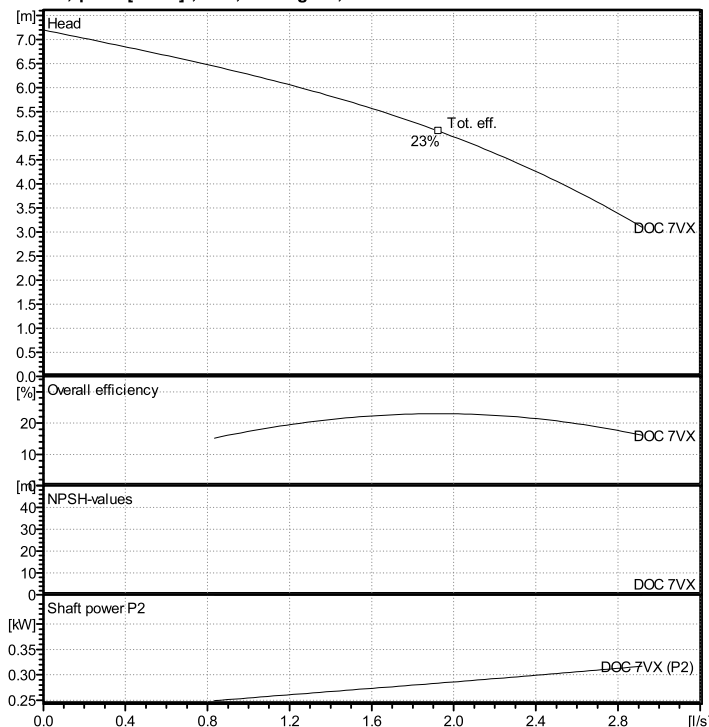

### Operating Data Specification

|      |       |
|------|-------|
| Flow | 0 l/s |
| Head | 0 m   |

### Hydraulic data (duty point)

|             |
|-------------|
| Flow        |
| Head        |
| Power input |


### Pump data

|                       |                       |
|-----------------------|-----------------------|
| Make                  | Lowara                |
| Type                  | DOC 7VX GW            |
|                       | Submersible sump pump |
| Speed                 | 2900                  |
| Head H(Q=0)           | 7.2 m                 |
| Suction side          |                       |
| Discharge side        |                       |
| Types of installation | Submersible pump      |
| Weight                | 6 kg                  |

### Materials / seals

|                  |                     |
|------------------|---------------------|
| Pump body        | PPO resin + 20 % GF |
| Suction strainer | PPO resin + 20 % GF |
| IMPELLER         | PA 66 + 30 % GF     |
| External case    | Stainless steel     |

Shaft Seal

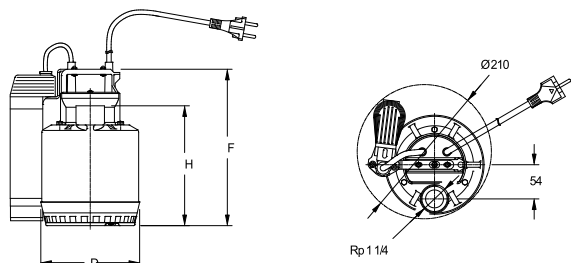

### Motor data

|                                     |         |                  |          |
|-------------------------------------|---------|------------------|----------|
| Rated power P2                      | 0.55 kW | Nom. Speed       | 2790 rpm |
| Frequency                           | 50      | Phase            | 1~       |
| Rated voltage                       | 230 V   | Rated current    | 2.96 A   |
| Protection class                    | IP X8   | Insulation class | B        |
| Permitted voltage tolerance +/- 10% |         |                  |          |

### Dimensions mm

|   |     |  |  |
|---|-----|--|--|
| D | 175 |  |  |
| F | 310 |  |  |
| H | 252 |  |  |
| X | 45  |  |  |

Note: