



## SANICOM® 2



**Simple and quick installation.**

**New inlets in Ø 75/80 on each side of the unit.**  
(connections possible in Ø ext 50 or 40)

**Lifting station** for grey water.




**Compact**


**Can accept grey water (no WC) up to 90°C.**

**Comes with control unit:**  
2 pumps operate alternately for more even use.

### SEMI-TRANSPARENT VIEW

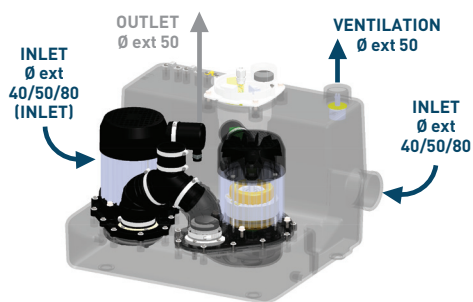

### PUMP CURVE

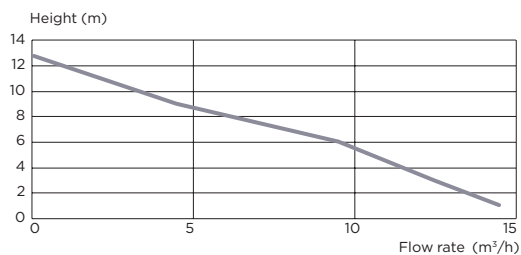

### PACKAGING

Sanicom lifting station with 2 pumps

Control unit (2m cable)

2 integrated non-return valves

### TECHNICAL FEATURES

<b>Tank volume</b>	34.5 L
<b>Ø Inlet</b>	low side entrance : ext. 80, ext. 50 and ext. 40
<b>Ø Discharge pipework</b>	DN50 (ext. 50 mm)
<b>Activation level</b>	145 mm
<b>Shower tray height</b>	250 mm minimum
<b>Ventilation</b>	50 mm
<b>Maximum incoming water temperature</b>	90°C intermittently (5 min. max.)
<b>Possible connections</b>	Grey water from a bathroom (no WC) kitchen or utility room
<b>Maximum recommended height</b>	11 m
<b>Particle size</b>	8 mm
<b>Voltage</b>	220-240 V / 50 Hz
<b>Motor power</b>	2 x 1500 W
<b>Maximum current</b>	13 A
<b>Weight (including accessories)</b>	26 kg
<b>IP rating</b>	IP44
<b>Electrical class</b>	Single phase

### APPLICATIONS



Individual dwelling



Commercial premises

### PUMPING DISTANCE

17 m



### WARRANTY



**Product Code:**  
1046/2

**Barcode:**  
EAN 3308815082868



External control unit  
(2 m cable)



Wired, audible  
and visual alarm  
box (5m cable)  
optional