

Sanicubic 1 VX

Grey water, black water

Sanicubic 1 VX is a lifting station with 1 vortex pump. It is designed for lifting waste water from houses or small commercial premises. Sanicubic 1 VX has direct and safe access to the motor and level sensors. The lifting station comes with a classic control box and a wired alarm.



PERFORMANCE

- Max. head : 12 m
- Max. flow rate : 40 m³/h

PRODUCT BENEFITS

- Floor standing for easy installation
- Easy access for maintenance
- 3 inlets
- Vortex technology
- Direct and safe access to the motor
- Comes with classic control box
- Comes with wired alarm



See page 10



DELIVERED AS STANDARD



Remote wired audible and visual alarm unit (5m)



Classic control box

OPTIONAL EXTRAS



Isolation valve
DN50 shut-off valve
Product code: 1109




Isolation valve
DN100 shut-off valve
Product code: 1107/1




Sanicubic carbon filter
Product code: 1108
Barcode: 3308815077529


DIMENSIONS

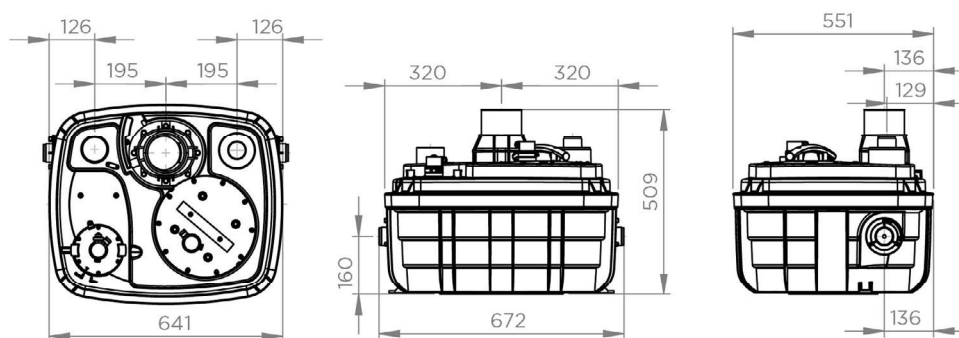

CURVE

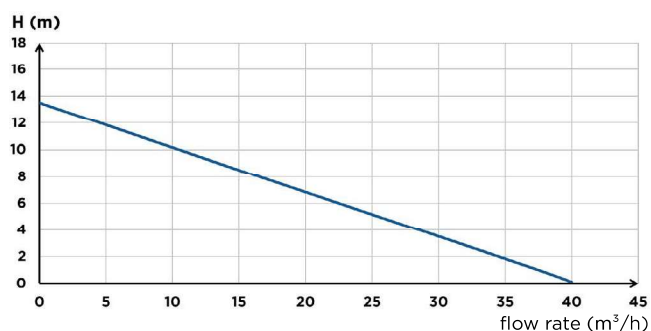

CONNECTIONS



- ➡ External inlet diameter : 40/50/100/110/125 mm
- ➡ Discharge diameter ext. : 90/110 mm
- ↔ Ext. ventilation diameter : 75 mm

	Sanicubic 1 VX
Type of control box	Classic
Material	
Tank	PP GF
Pump housing	PA 12 GF
Motor housing	PA 12 GF
Impeller	PPO GF
Electrical features	
Voltage (V)	230
Frequency (Hz)	50-60
Power consumption P1 (W)	2000
Power output P2 (W)	1400
Mode of operation	S3 15 %
IP rating	IP68
Hydraulics	
Max. head (m)	13.5
Max. flow rate (m³/h)	40
External inlet diameter (mm)	40/50/100/110/125
Discharge diameter ext. (mm)	90/110
Ext. ventilation diameter (mm)	75
Total volume (L)	60
Useable volume (L)	21
ON level /OFF level (mm)	165/95
Alarm level (mm)	235
Particle size (mm)	50
Max. temperature of the pumped liquid (5 min)	70°C
Type of impeller	vortex
Type of activation	pneumatic
Identification and logistics	
Gross weight (kg)	30
EAN code	3308815077611
Product code	30005